




Programmable Wiegand[®] Technology

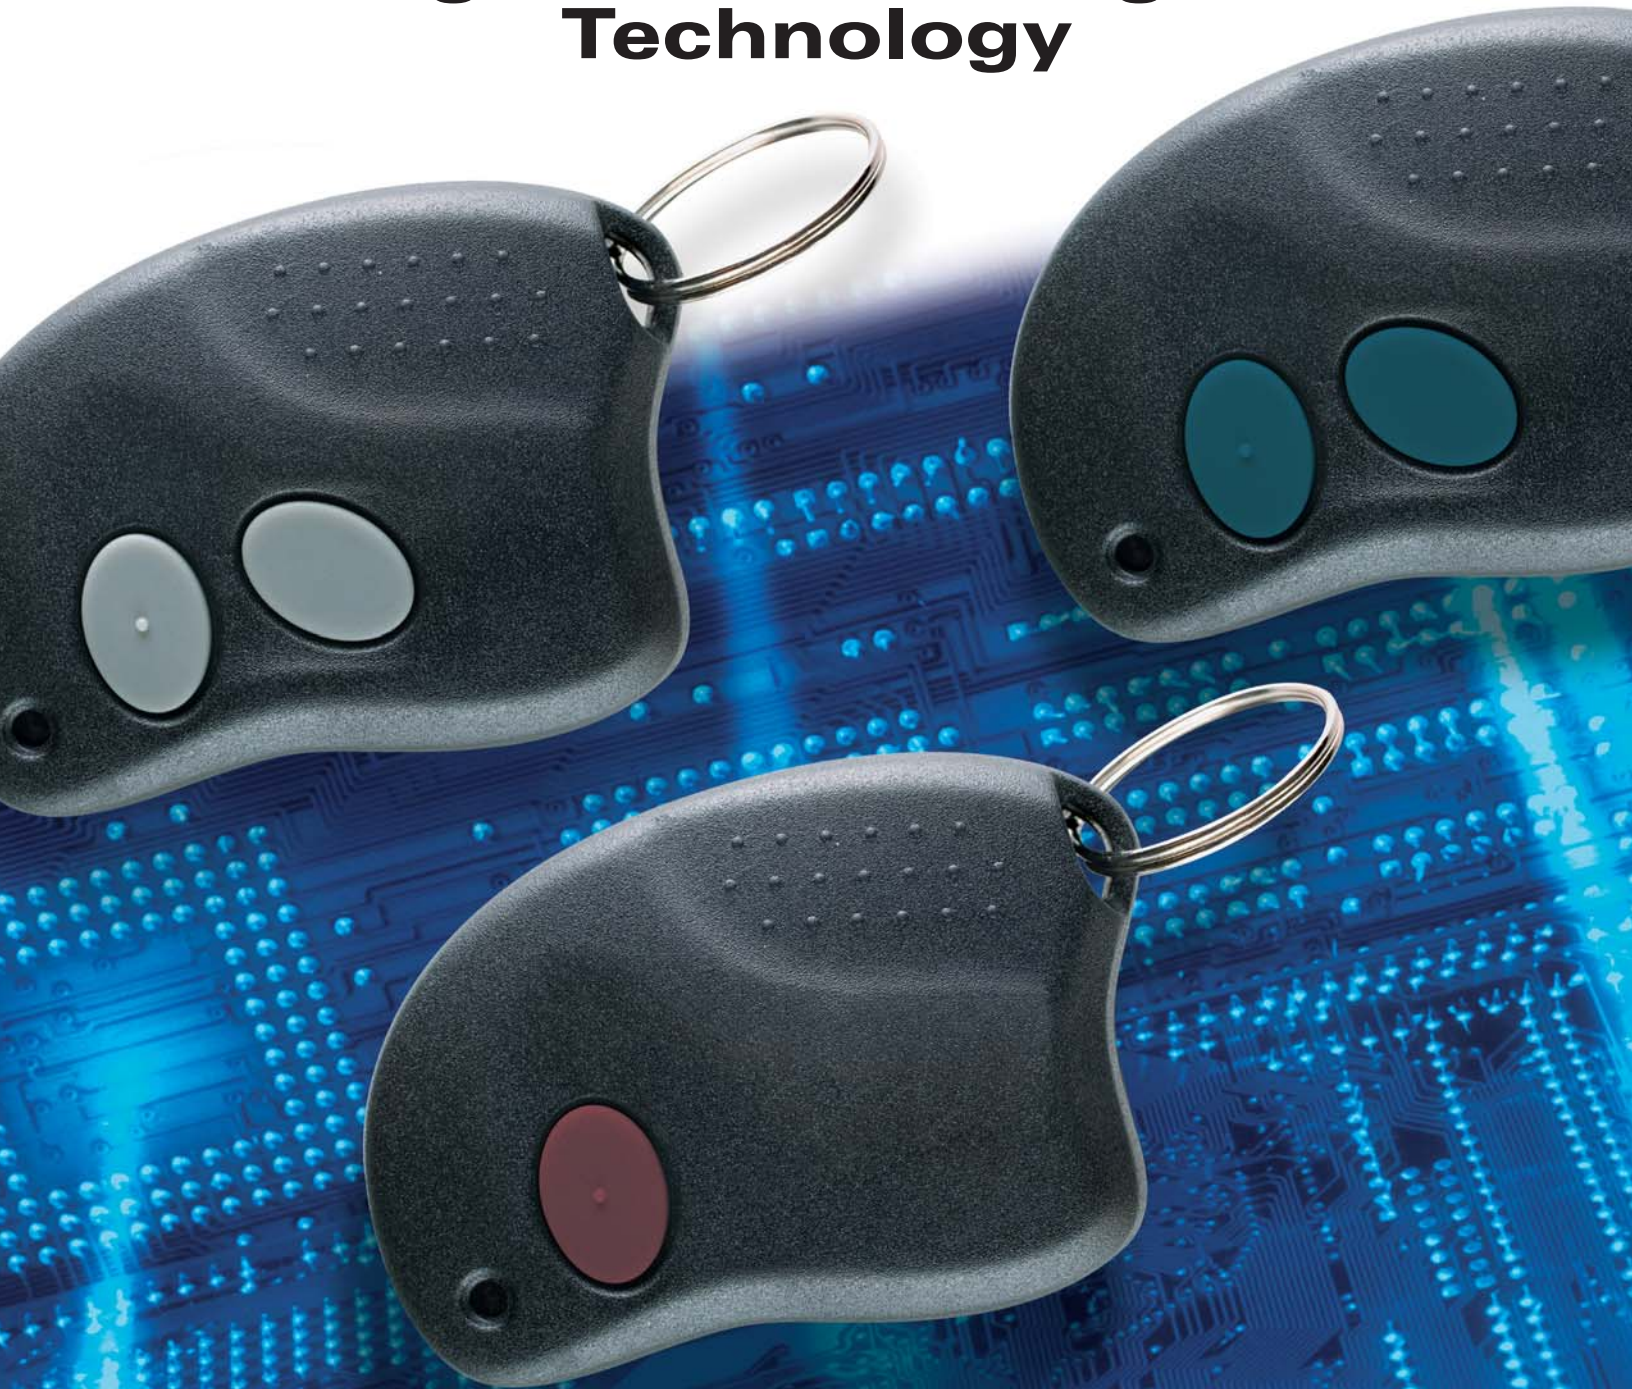

Compatible with ALL systems.

Transmitters

- Operating Frequency
 - RCS-433CTG1/2/4*** 26-bit Wiegand® 433MHz
 - RCS-418CTGR1/2** BUS485 Dial Code 418MHz
 - RCS-318CTB1/2** 26-bit Wiegand® 318MHz
 - RCS-318CTYL1/2** 26-bit Wiegand® 318MHz
 - RCS-295CTR1/2** 30-bit Wiegand® 295MHz
- Number of Buttons 1, 2, or 4*
** 4 buttons only available in 433MHz transmitters.*
- Power Supply GVDC
- Battery 1 x 12V 23A Alkaline
- Facility Codes Multiple Codes
- Code Combinations 65528
- Dimensions 2.5" x 1.5" x .625"
- Warranty 6 Month Battery

Receiver

Receiver Card Specifications

- Operating Frequency
 - RCS-433RC** 433MHz
 - RCS-418RC** 418MHz
 - RCS-318RC** 318MHz
 - RCS-310RC** 310MHz
 - RCS-300RC** 300MHz
 - RCS-295RC** 295MHz
- Receiver Type Superheterodyne: AM/ASK

Receiver Housing Specifications

- Operating Frequency
 - Use any two RCS receiver cards simultaneously
- Includes Internal 4.7 Kohm pull-up resistor
- Operating Formats
 - 26-bit Wiegand
 - 30-bit Wiegand
 - Bus-485
 - Stand-Alone Dry contact Relay output NO/NC
 - With Internal memory card options up to 500
- Power Supply 12/24 V ac/dc
- Housing Rating IP 55 or NEMA 12
- Overall Dimensions 4.25 x 4.25 x 2.25



Better Technology, Better Transmitters

4862 East Baseline Road • Suite 104 • Mesa, AZ 85206

Tel: 480.281.1878 • Fax: 480.281.1883

1.866.770.0727

www.rcsremotes.com • info@rcsremotes.com